




88° T-dies, H=120 (4.72)

### T120.10.88 / TR120.10.88

1000 kN/m max.

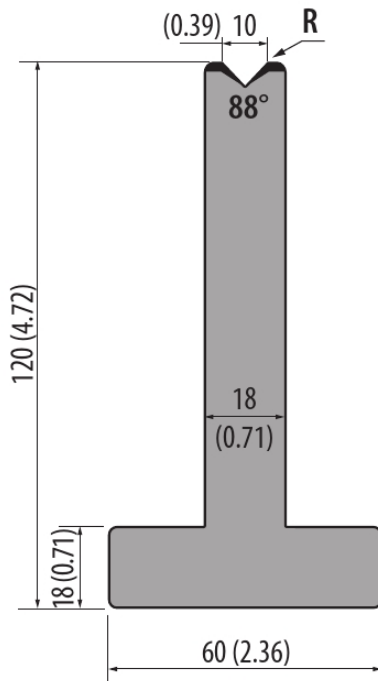

|                    |                  | R=0.8 (0.031)      |         |
|--------------------|------------------|--------------------|---------|
| <b>T120.10.88</b>  | 835 mm           | 32.87 in           | 19.0 kg |
|                    | 415 mm           | 16.34 in           | 9.5 kg  |
|                    | 795 mm segmented | 31.29 in segmented | 18.0 kg |
|                    | 805 mm segmented | 31.69 in segmented | 18.3 kg |
|                    |                  | R=2.75 (0.108)     |         |
| <b>TR120.10.88</b> | 835 mm           | 32.87 in           | 18.0 kg |
|                    | 415 mm           | 16.34 in           | 9.0 kg  |
|                    | 795 mm segmented | 31.29 in segmented | 17.1 kg |
|                    | 805 mm segmented | 31.69 in segmented | 17.4 kg |

C45: 560-710 N/mm<sup>2</sup>



For more information, to arrange a demonstration or to enquire about purchasing this machine please contact us by email [sales@capitalmachinery.com.au](mailto:sales@capitalmachinery.com.au) or by calling **1800 706 620**