




75° TOP-Punches

TOP.175.75.R08 / R2

750 kN/m max.

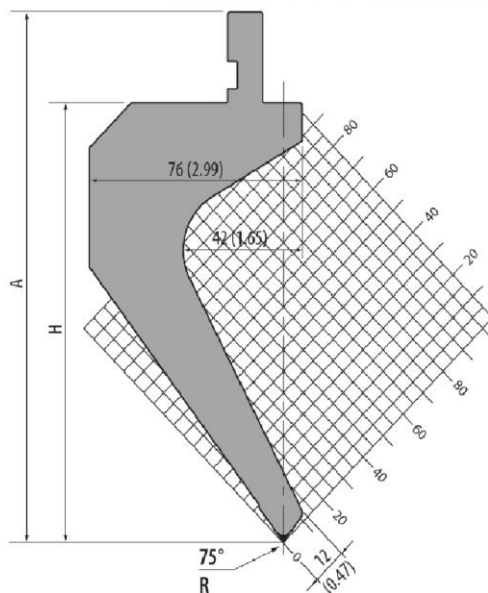

TOP.175.75.R08		
H=145.00 / A=175.00 / R=0.8 (H=5.71 / A=6.89 / R=0.031)		
525 mm	20.67 in	21.5 kg
495 mm segmented	19.49 in segmented	20.3 kg
500 mm segmented	19.68 in segmented	20.5 kg

TOP.175.75.R2		
H=144.20 / A=174.20 / R=2.0 (H=5.68 / A=6.86 / R=0.079)		
525 mm	20.67 in	21.5 kg
495 mm segmented	19.49 in segmented	20.3 kg
500 mm segmented	19.68 in segmented	20.5 kg

42Cr: 900-1150 N/mm²



For more information, to arrange a demonstration or to enquire about purchasing this machine please contact us by email sales@capitalmachinery.com.au or by calling **1800 706 620**