





SUN MASTER
ONE-STOP SOLUTION

MANUAL LATHE

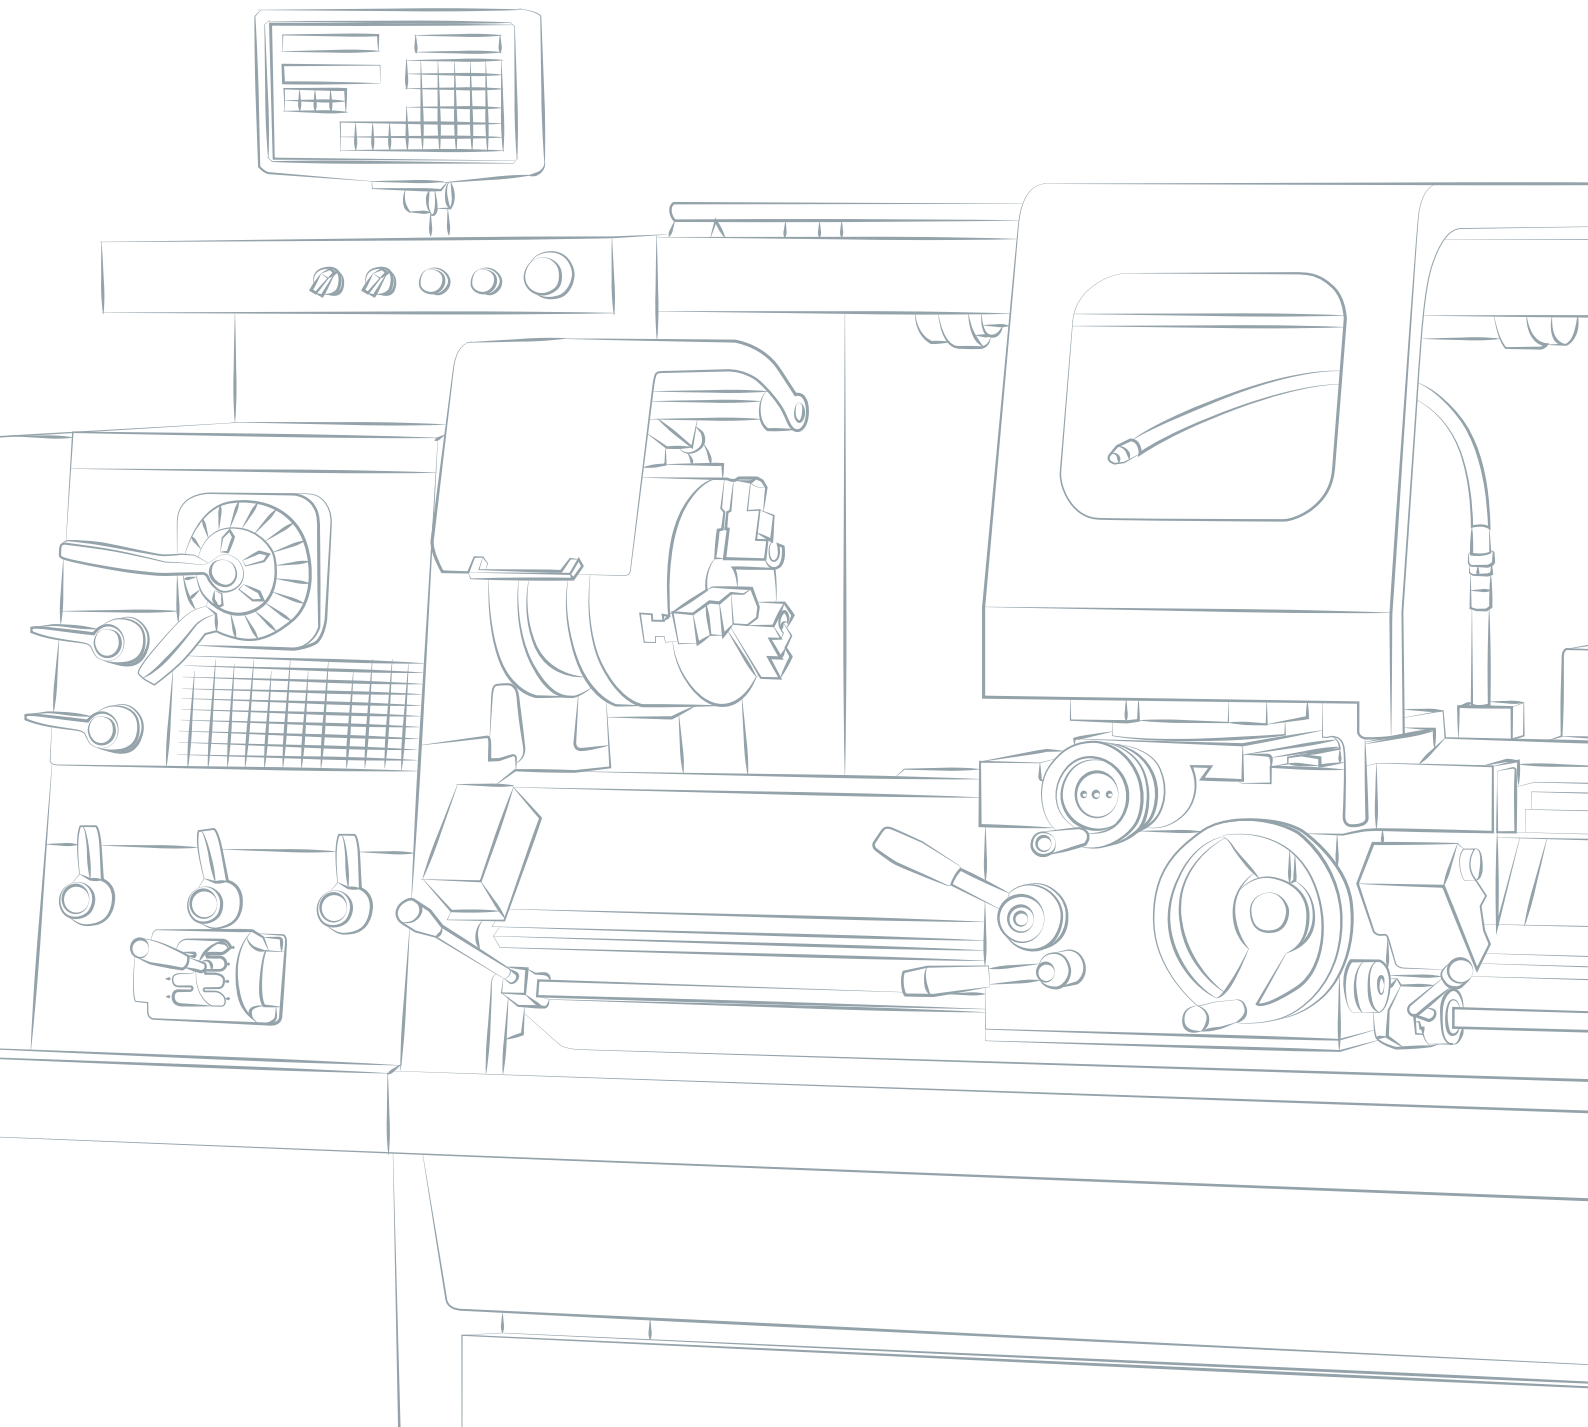



SUN MASTER

BRAND

SUN MASTER is internationally recognized for our high-quality precision lathes. We focus on providing precise and reliable machines designed to meet and exceed international standards. Our commitment to quality and expert workmanship has made us a leader in offering machines that fully meet our customers' strict performance requirements.

We maintain an excellent reputation for innovative design, superior R&D and broad manufacturing capabilities. By setting high goals, and upholding our core values of sustained growth and reliable performance, we have earned the trust of customers worldwide.

Let the SUN MASTER brand brings you the new vision and victories, and help you gain new heights in all your machining operations.



R&D



VICTORY



GOALS




COMPANY

Established in 1994, SHUN CHUAN brought together an engineering team with extensive experience and a deep understanding of machine tool manufacturing. Laying its foundation on the manufacturing of manual precision lathes, SHUN CHUAN soon gained an international reputation for high quality lathes.


Understanding the critical importance of material properties in the design of quality machines, SHUN CHUAN does most of machining to guarantee that every lathe maintains dependable and consistent structural integrity.

SHUN CHUAN is a rising company, and by continuing to focus on the design and development of manual precision lathe designs, we will maintain the same quality you have come to expect from all our machining products.

SHUN CHUAN truly is your ONE-STOP SOLUTION provider for top quality, reliable, precision machinery lathes, offering you the finest in Innovation, Design, Casting, Processing, Surface Finishing, Assembly, Electronics, Quality Inspection, Delivery and Service.

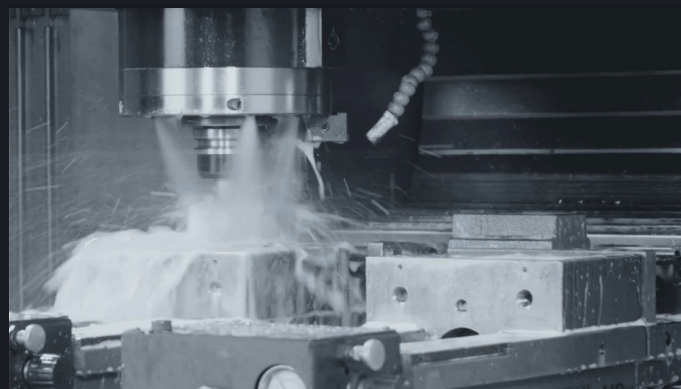

SUN MASTER CONTENTS

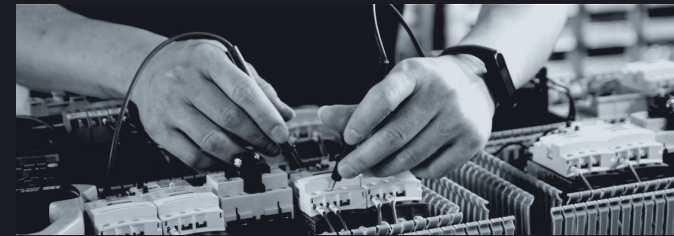

5

FEATURES



ERL SERIES

7



RML SERIES

9




BHL SERIES

11



TC SERIES

13




FC SERIES

15



AHL SERIES

17



CH SERIES



19

21

OPTIONAL ACCESSORIES

SUN MASTER FEATURES

Nylon safety gears in end train. (For specified models.)
Shear pin in lead screw.
Low voltage control in electrical cabinet.

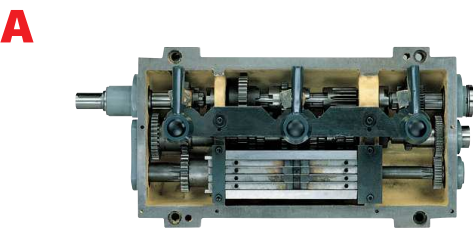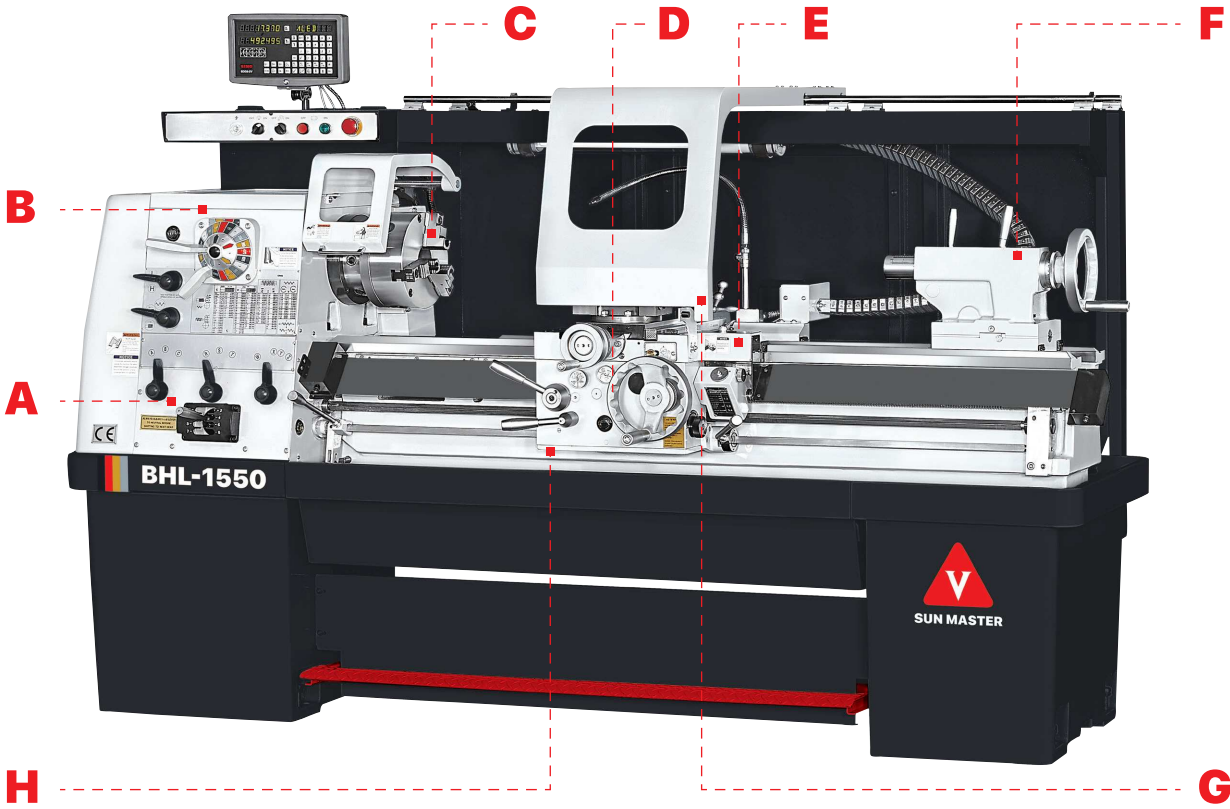

GEAR BOX

- The universal type gear box provides a wide range of inch, metric, M.P. and D.P. threads (CH series does not offer M.P. & D.P. threads function) without changing any gear for increased convenience.
- Gears are hardened.
- Oil bath lubrication in gear box.



RUGGED HEADSTOCK

- Head housing features outstanding vibration dampening and deformation free performance.
- Rugged head construction gives extra rigidity and heavy cutting.
- All gears and shafts are hardened and precision ground by high precision equipment.



HEAVY DUTY SPINDLE

- Camlock type spindle.
- Precision machined from forged alloy steel, hardened, precision ground and dynamically balanced.
- Three-Point support by high precision taper roller and ball bearings eliminates chatter when performing heavy duty cutting.

SUN MASTER FEATURES



APRON

- The apron is a double wall construction, provides a firm support for power feed shaft.
- Choice of right or left hand wheel.
- Integrated automatic control for longitudinal and cross feeds, forward and reverse feeds.
- An interlock design prevents simultaneous power feed and threading cutting.



CARRIAGE & CROSS SLIDE

- Anti-float backlash eliminator is fitted in cross slide nut.
- Safety clutch is equipped to feed shaft.
- One shot lubrication for carriage and top slide.
- Designed with dual dials for inch system screw.
- Designed with metric dial for metric system screw.



RUGGED TAILSTOCK


- Tailstock quill is graduated in inch/metric scales and has a tang slot for positive drive of tool.
- 2-step tailstock is available on request. (standard for CH series)

COMPOUND REST

- The compound rest has T-slot for convenience mounting of tool holder. (imperial models only)
- Both the cross slide and the compound rest screws are equipped with inch/metric graduated dials.
- The bottom of the compound slide is graduated in degrees for quick reference when swiveling.

BED

- The ruggedly constructed bed is manufactured from Meehanite cast iron and stress relieved.
- Bed ways are hardened and precision ground.

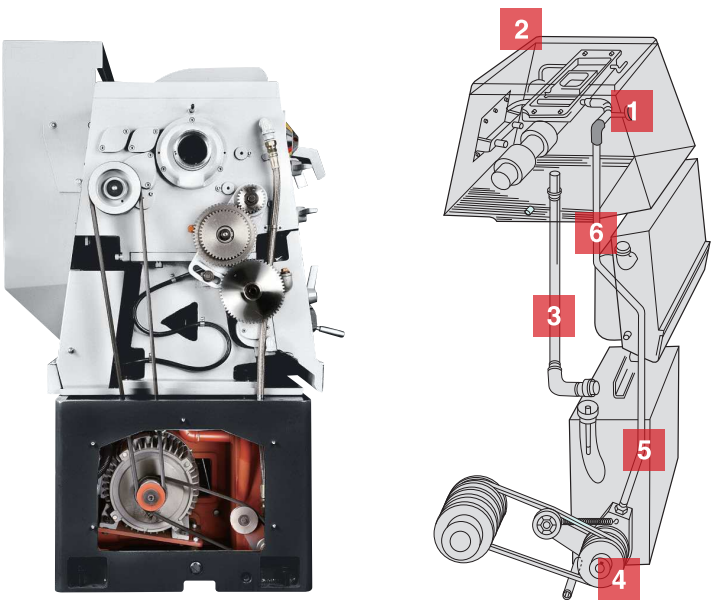

FORCED LUBRICATION IN HEADSTOCK (for AHL & BHL)

- 1 Oil sight window for checking oil level.
- 2 Pressure lubrication system in headstock ensures better lubrication and cooling effect.
- 3 Hot oil return.
- 4 Oil pump.
- 5 Oil reservoir.
- 6 Cooling oil inlet.



ERL-1330 / 1340
ERL-1330V / 1340V

- All models with oil bathed lubrication system to headstock.
- All models meet CE. (Upon request)
- All models with 40 mm (1.57") spindle bore, ASA D1-4.

Features

- All castings are properly stabilized and stress relieved.
- Bed ways are hardened & ground to min. HRC48-55
- Extremely low noise level.
- Foot brake pedal provided.
- Built-in coolant pump & fitting provided.
- CSS (constant surface speed control) on request for E.V.S. model.
- Wider bed way which give absorbs vibration.

Standard Accessories

- Backplate for 7" chuck
- Dead center MT. No. 3
- Dead center MT. No. 3 with carbide tip
- Spindle center sleeve MT. No. 5
- Level pads.....6 pcs
- Tool set & Box
- Operation manual & parts list
- Full length splash guard
- Working lamp

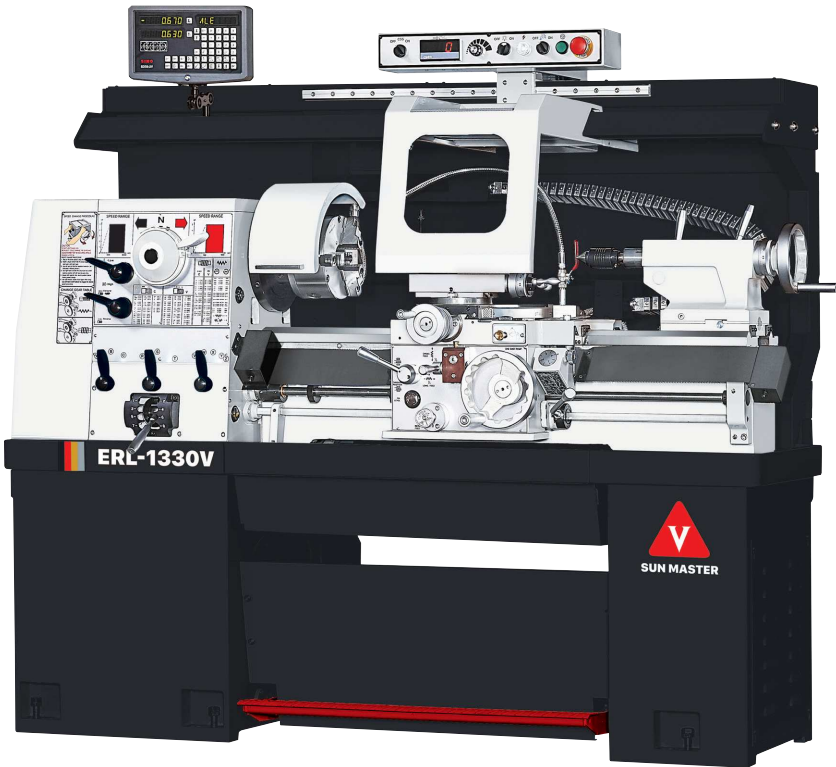


Photo shown ERL-1330V / G4

ERL	1330	1340	1330V	1340V
Capacity				
Height of centers	171 (6.73")			
Swing over bed	Ø342 (13.46")			
Swing in gap	--	Ø512 (20")	--	Ø512 (20")
Swing over cross slide	Ø205 (8.07")			
Distance between centers	760 (30")	1000 (40")	760 (30")	1000 (40")
Width of bed	230 (9")			
Gap width in front of faceplate	--	150 (5")	--	150 (5")
Headstock and Main Spindle				
Spindle nose, internal taper	D1-4, MT. No. 5			
Spindle center sleeve	MT. No. 5 x MT. No. 3			
Spindle bore	Ø40 (1.57")			
Spindle speed:	8 steps / 80 ~ 2000 R.P.M.		2 steps / L 100~500 R.P.M.	
Gear steps / Range	Opt. 16 steps / 4P 50 ~ 1305 R.P.M. 2P 100 ~ 2570 R.P.M.		H 500~3000 R.P.M. Infinitely variable	
Carriage				
Length on bed / Width of carriage	400 (15.748") / 384 (15.118")			
Cross slide travel	180 (7")			
Top slide travel	95 (3.74")			
Threads and Feeds				
Whitworth threads: Kinds / Range	45 Kinds / 2 ~ 72 T.P.I.			
Metric threads: Kinds / Range	39 Kinds / 0.2 ~ 14 mm			
D.P. threads: Kinds / Range	21 Kinds / 8 ~ 44 D.P.			
M.P. threads: Kinds / Range	18 Kinds / 0.3 ~ 3.5 M.P.			
Longitudinal feeds	0.05 ~ 1.7 (0.002" ~ 0.067")			
Cross feeds	0.025 ~ 0.85 (0.001" ~ 0.034")			
Tailstock				
Quill diameter	Ø50 (1.968")			
Quill travel	112 (4.5")			
Taper of center	MT. No. 3			
Motor				
Main spindle	Std. 3HP (2.2kW)	Opt. 5 HP 2P / 2.5 HP 4P	3HP (2.2kW), Motor / Inverter	
Forced lubrication for headstock	--		1/4 HP	
Coolant pump	1/8 HP			
Measurement				
Weight (Net) approx	930 kgs	1000 kgs	930 kgs	1000 kgs
Weight (Gross) approx	1050 kgs	1120 kgs	1050 kgs	1120 kgs
Packing size (Length)	2000 (78.8")	2270 (89.4")	2000 (78.8")	2270 (89.4")
Packing size (Width x Height)	965 (38") x 1900 (74.8")			

Specifications subject to change without notice.

Unit: mm



RML-1430 / 1440 / 1460 / 1630 / 1640 / 1660
RML-1430V / 1440V / 1460V / 1630V / 1640V / 1660V

- E.V.S models with auto lubrication system to headstock & external tank for cooling the oil.
- All models with one piece solid stand.
- All models with universal feed gearbox & reversible apron.
- All models meet CE. (Upon request)
- All models with 52.5 mm (2.066") spindle bore, ASA D1-6.

Features

- All castings are properly stabilized and stress relieved.
- Bed ways are hardened & ground to min. HRC48-55
- Turcite B coating between the bed and carriage.
- Extremely low noise level.
- Foot brake pedal provided.
- Built-in coolant pump & fitting provided.
- CSS (constant surface speed control) on request for E.V.S. model.
- Wider bed way which give absorbs vibration.

Standard Accessories

- Backplate for 9" chuck
- Dead center MT. No. 4
- Dead center MT. No. 4 with carbide tip
- Spindle center sleeve MT. No. 6
- Level pads.....6 pcs
- Tool set & Box
- Operation manual & parts list
- Full length splash guard
- Working lamp

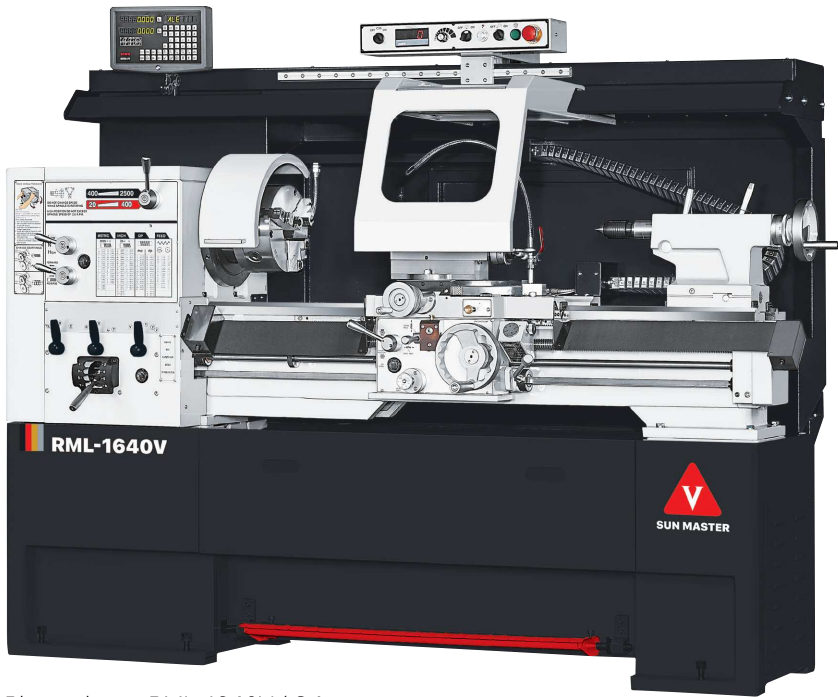


Photo shown RML-1640V / G4

RML	1430	1440	1460	1630	1640	1660
	1430V	1440V	1460V	1630V	1640V	1660V
Capacity						
Height of centers	180 (7.08")			205 (8.07")		
Swing over bed	Ø360 (14.17")			Ø410 (16.14")		
Swing in gap	--	Ø533 (20.98")		--	Ø583 (22.95")	
Swing over cross slide	Ø210 (8.35")			Ø262 (10.3")		
Distance between centers	800 (31.5")	1000 (40")	1500 (60")	800 (31.5")	1000 (40")	1500 (60")
Width of bed	260 (10.236")					
Gap width in front of faceplate	--	135 (5.31")	225 (8.85")	--	135 (5.31")	225 (8.85")
Headstock and Main Spindle	Std.			Opt.		
Spindle nose, internal taper	D1-6 / A1-6 (Opt.), MT. No. 6			D1-6		
Spindle center sleeve	MT. No. 6 x MT. No. 4			70 Taper 1/19.18 x MT No. 4		
Spindle bore	Ø52.5 (2.066")			Ø65 (2.55")		
Spindle speed:	Std. : 8 steps / 70 ~ 1800 R.P.M.			Opt. for Ø65 spindle bore		
Gear steps / Range	Opt. : 16 steps / 8P 40 ~ 1000 R.P.M.			12 steps / 36 ~ 1800 R.P.M.		
	4P 80 ~ 2000 R.P.M.					
	For Ø52.5 spindle bore 2 steps / L: 20~400 R.P.M. H: 400~2500 R.P.M. Opt. : 25~3000 R.P.M.			For Ø65 spindle bore 3 steps / L: 30~145 R.P.M. M: 105~510 R.P.M. H: 400~2500 R.P.M.		
Infinitely variable						
Carriage						
Length on bed / Width of carriage	513 (20.19") / 412 (16.22")					
Cross slide travel	220 (8.6")					
Top slide travel	125 (4.92")					
Threads and Feeds						
Whitworth threads: Kinds / Range	45 Kinds / 2 ~ 72 T.P.I.					
Metric threads: Kinds / Range	39 Kinds / 0.2 ~ 14 mm					
D.P. threads: Kinds / Range	21 Kinds / 8 ~ 44 D.P.					
M.P. threads: Kinds / Range	18 Kinds / 0.3 ~ 3.5 M.P.					
Longitudinal feeds	0.05 ~ 1.7 (0.002" ~ 0.067")					
Cross feeds	0.025 ~ 0.85 (0.001" ~ 0.034")					
Tailstock						
Quill diameter	Ø52 (2.047")					
Quill travel	152 (6")					
Taper of center	MT. No. 4					
Motor	Std. : 5 HP (3.75kW) 4 P					
Main spindle	Opt. : 5 HP 4 P / 2.5 HP 8 P (for 52.5 spindle bore only)					
	Motor AC 3.75 kW (5 HP); Inverter 3.75 kW (5 HP) for 52.5 spindle bore, 5.625 kW (7.5HP) for 65 spindle bore					
Forced lubrication for headstock	--					
	1/4 HP					
Coolant pump	1/8 HP					
Measurement						
Weight (Net) approx	1300 kgs	1350 kgs	1450 kgs	1350 kgs	1400 kgs	1500 kgs
Weight (Gross) approx	1400 kgs	1470 kgs	1610 kgs	1450 kgs	1520 kgs	1660 kgs
Packing size (Length)	2070 (81.5")	2270 (89.4")	2785 (109.7")	2070 (81.5")	2270 (89.4")	2785 (109.7")
Packing size (Width x Height)	1120 (44.1") x 1900 (74.8")					

Specifications subject to change without notice.

Unit: mm



BHL-1550 / 1550V

- All models with mechanical clutch. (excluded E.V.S. model)
- All models with auto lubrication system to headstock & external tank for cooling the oil.
- All models meet CE. (Upon request)
- All models with 56 mm (2.2") spindle bore, ASA D1-6.

Features

- All castings are properly stabilized and stress relieved.
- Bed ways are hardened & ground to min. HRC 48-55.
- Turcite B coating between the bed and carriage.
- Extremely low noise level.
- Foot brake pedal provided.
- Built-in coolant pump & fitting provided.
- CSS (constant surface speed control) on request for E.V.S. model.
- Wider bed way which give absorbs vibration.

Standard Accessories

- Backplate for 9" chuck
- Dead center MT. No. 4
- Center MT. No. 4 with carbide tip
- Spindle center sleeve MT. No. 6
- Level pads.....8 pcs
- Tool set & Box
- Full length splash guard
- Operation manual & parts list

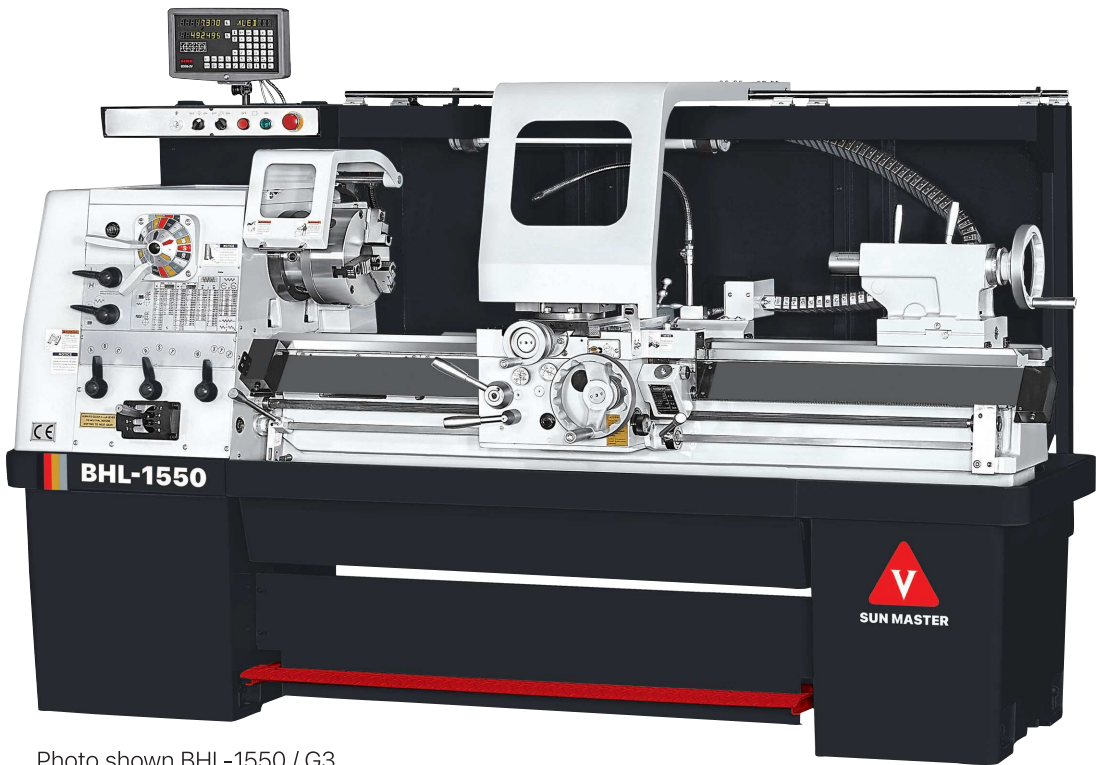


Photo shown BHL-1550 / G3

BHL	1550	1550V
Capacity		
Height of centers	190 (7.48")	
Swing over bed	Ø380 (14.96")	
Swing in gap	Ø610 (24")	
Swing over cross slide	Ø238 (9.37")	
Distance between centers	1250 (50")	
Width of bed	280 (11")	
Gap width in front of faceplate	265 (10.43")	
Headstock and Main Spindle		
Spindle nose, internal taper	D1-6, MT. No. 6	
Spindle center sleeve	MT. No. 6 x MT. No. 4	
Spindle bore	Ø56 (2.2")	
Spindle speed:	16 steps / 25 ~ 2000 R.P.M.	4 steps
Gear steps / Range	Silver 25 80 260 840	L 22 ~ 72 R.P.M.
	Golden 33 108 350 1120	M 70 ~ 235 R.P.M.
	Red 45 140 470 1500	MH 235 ~ 780 R.P.M.
	Black 60 190 625 2000	H 753 ~ 2500 R.P.M.
Disc clutch for forward / Reverse		Infinitety variable
Carriage		
Length on bed / Width of carriage	484 (19.05") / 450 (17.71")	
Cross slide travel	235 (9.25")	
Top slide travel	120 (4.72")	
Threads and Feeds		
Whitworth threads: Kinds / Range	45 Kinds / 2 ~ 72 T.P.I.	
Metric threads: Kinds / Range	39 Kinds / 0.2 ~ 14 mm	
D.P. threads: Kinds / Range	21 Kinds / 8 ~ 44 D.P.	
M.P. threads: Kinds / Range	18 Kinds / 0.3 ~ 3.5 M.P.	
Longitudinal feeds	0.04 ~ 1.0 (0.0015" ~ 0.04")	
Cross feeds	0.02 ~ 0.5 (0.00075" ~ 0.02")	
Tailstock		
Quill diameter	Ø59 (2.322")	
Quill travel	127 (5")	
Taper of center	MT. No. 4	
Motor		
Main spindle	7.5 HP	AC 5.5 kW (7.5 HP), Inverter
Forced lubrication for headstock	--	1/4 HP
Coolant pump	1/8 HP	
Measurement		
Weight (Net) approx	1450 kgs	
Weight (Gross) approx	1610 kgs	
Packing size (Length)	2580 (101.58")	
Packing size (Width x Height)	1120 (44.1") x 1900 (74.8")	

Specifications subject to change without notice.

Unit: mm



TC-1640 / 1660 / 1840 / 1860
TC-1640V / 1660V / 1840V / 1860V

- All models with one piece stand.
- All models with universal feed gearbox & reversible apron.
- All models meet CE. (Upon request)
- All models with 65 mm (2.55") spindle bore, ASA D1-6.
- EVS models with auto lubrication system to headstock & external tank for cooling the oil.

Features

- All castings are properly stabilized and stress relieved.
- Bed ways are hardened & ground to min. HRC 48-55.
- Turcite B coating between the bed and carriage.
- Extremely low noise level.
- Foot brake pedal provided.
- Built-in coolant pump & fitting provided.
- Wider bed way which give absorbs vibration.

Standard Accessories

- Backplate for 9" chuck
- Dead center MT. No. 4
- Dead center MT. No. 4 with carbide tip
- Spindle center sleeve MT. No. 6
- Level pads.....6 pcs
- Tool set & Box
- Operation manual & parts list
- Full length splash guard
- Working lamp

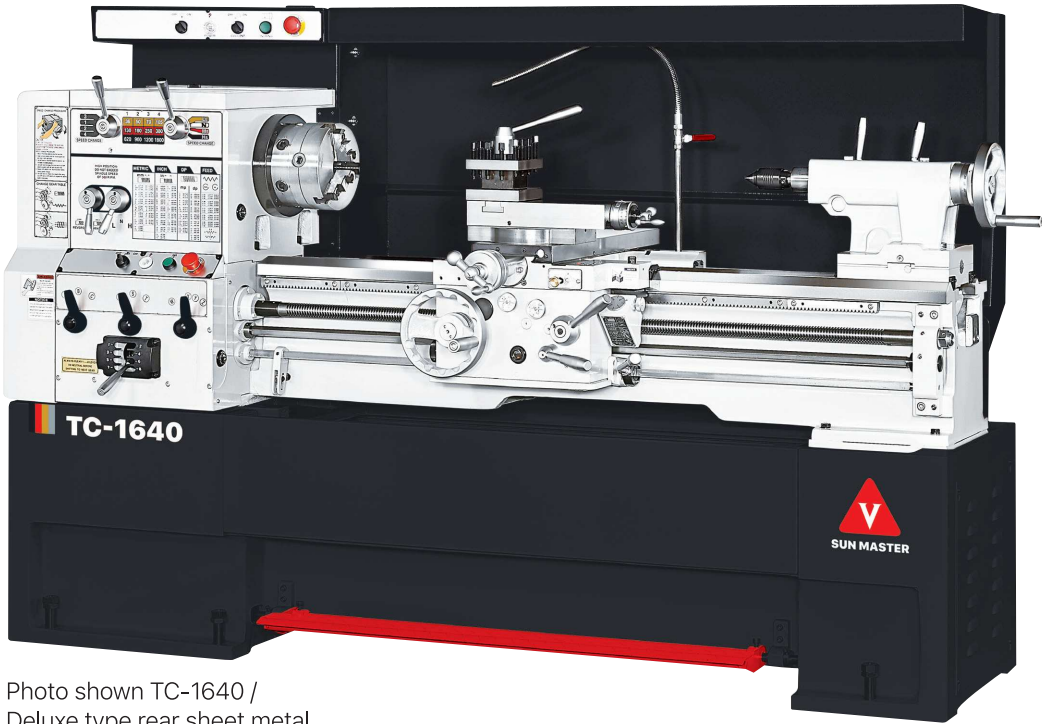


Photo shown TC-1640 /
Deluxe type rear sheet metal.

TC	1640	1660	1840	1860
	1640V	1660V	1840V	1860V
Capacity				
Height of centers	205 (8.07")		231 (9.09")	
Swing over bed	Ø410 (16.14")		Ø462 (18.18")	
Swing in gap	Ø620 (24.4")		Ø652 (25.66")	
Swing over cross slide	Ø255 (10.04")		Ø305 (12")	
Distance between centers	1000 (40")	1500 (60")	1000 (40")	1500 (60")
Width of bed	305 (12")			
Gap width in front of faceplate	120 (4.72")			
Headstock and Main Spindle				
Spindle nose, internal taper	D1-6 (Std.) / A1-6 (Opt.)			
Spindle center sleeve	Ø70 (2.76") Taper 1/19.18 x MT. No. 4			
Spindle bore	Ø65 (2.55")			
Spindle speed:	12 steps / 36 ~ 1800 R.P.M.			
Gear steps / Range	A (36, 50, 70, 105 R.P.M.) B (130, 180, 250, 380 R.P.M.) C (620, 900, 1200, 1800 R.P.M.)			
	3 steps / 30 ~ 2500 R.P.M., Infinitely variable			
Carriage				
Cross slide travel	250 (9.84")	260 (10.23")	250 (9.84")	260 (10.23")
Top slide travel	155 (6.1")			
Threads and Feeds				
Whitworth threads: Kinds / Range	45 Kinds / 2 ~ 72 T.P.I.			
Metric threads: Kinds / Range	39 Kinds / 0.2 ~ 14 mm			
D.P. threads: Kinds / Range	21 Kinds / 8 ~ 44 D.P.			
M.P. threads: Kinds / Range	18 Kinds / 0.3 ~ 3.5 M.P.			
Longitudinal feeds	0.04 ~ 1.0 (0.0015" ~ 0.04")			
Cross feeds	0.02 ~ 0.5 (0.00075" ~ 0.02")			
Tailstock				
Quill diameter	Ø59 (2.322")			
Quill travel	127 (5")			
Taper of center	MT. No. 4			
Motor				
Main spindle	5 HP (3.75 kW)			
	Motor 3.75kW (5 HP), Inverter 5.625kW (7.5 HP)			
Forced lubrication for headstock	--			
	1/4 HP			
Coolant pump	1/8 HP			
Measurement				
Weight (Net) approx	1600 kgs	1750 kgs	1650 kgs	1800 kgs
Weight (Gross) approx	1800 kgs	2000 kgs	1850 kgs	2050 kgs
Packing size (Length)	2400	2900	2400	2900
Packing size (Width x Height)	1115 (43.9") x 1900 (74.8")			

Specifications subject to change without notice.

Unit: mm



FC-1640 / 1660 / 1840 / 1860 / 1880
FC-2140 / 2160 / 2180
FC-1640V / 1660V / 1840V / 1860V / 1880V
FC-2140V / 2160V / 2180V

- All models with one piece solid stand.
- All models with universal feed gearbox & reversible apron.
- All models meet CE. (Upon request)
- All models with 80 mm (3.149") spindle bore, ASA D1-8.
- All models cross slide is hardened and ground to prolong operation life.

Features

- All castings are properly stabilized and stress relieved.
- Bed ways are hardened & ground to min. HRC 48-55.
- Turcite B coating between the bed and carriage.
- Extremely low noise level.
- Foot brake pedal provided.
- Built-in coolant pump & fitting provided.
- Wider bed way which give absorbs vibration.
- Y-Δ type spindle motor equipped to make sure smooth start and operation.

Standard Accessories

- Backplate for 10" chuck
- Dead center MT. No. 5
- Dead center MT. No. 4 with carbide tip
- Spindle center sleeve Ø85 mm Taper 1/19.18
- Level pads.....6~8 pcs
- Tool set & Box
- Operation manual & parts list
- Full length splash guard
- Working lamp



Photo shown FC-2160V / G3



Photo shown FC-2180 / G1

FC	1640	1660	1840	1860	1880	2140	2160	2180
	1640V	1660V	1840V	1860V	1880V	2140V	2160V	2180V
Capacity								
Height of centers	205 (8.07")		231 (9.05")			271 (10.67")		
Swing over bed	Ø410 (16.14")		Ø462 (18.11")			Ø542 (21.34")		
Swing in gap	Ø583 (22.95")		Ø650 (25.59")			Ø730 (28.74")		
Swing over cross slide	Ø262 (10.3")		Ø305 (12")			Ø387 (15.23")		
Distance between centers	1000 (40")	1500 (60")	1000 (40")	1500 (60")	2120 (83.46")	1000 (40")	1500 (60")	2120 (83.46")
Width of bed	320 (12.5")							
Headstock and Main Spindle								
Spindle nose, internal taper	D1-8 / A1-8 (Opt.), Ø85 Taper 1/19.18							
Spindle center sleeve	Ø85 Taper 1/19.18 x MT. No. 5							
Spindle bore	Ø80 (3.149")							
Spindle speed:	12 steps /							
Gear steps / Range	A (26, 40, 60, 90 R.P.M.)		B (105, 145, 205, 305 R.P.M.)		C (510, 715, 1000, 1500 R.P.M.)			
	3 steps / Infinitely variable							
	L (25~100 R.P.M.)		M (75~370 R.P.M.)		H (360~1800 R.P.M.)			
Carriage								
Cross slide travel	250 (9.84")		300 (11.81")					
Top slide travel	150 (5.9")							
Threads and Feeds								
Whitworth threads: Kinds / Range	45 Kinds / 2 ~ 72 T.P.I.							
Metric threads: Kinds / Range	39 Kinds / 0.2 ~ 14 mm							
D.P. threads: Kinds / Range	21 Kinds / 8 ~ 44 D.P.							
M.P. threads: Kinds / Range	18 Kinds / 0.3 ~ 3.5 M.P.							
Longitudinal feeds	0.04 ~ 1.0 (0.0015" ~ 0.04")							
Cross feeds	0.02 ~ 0.5 (0.00075" ~ 0.02")							
Tailstock								
Quill diameter	Ø59 (2.322")				Ø68 (2.677")	Ø59 (2.322")		Ø68 (2.677")
Quill travel	127 (5")				153 (6")	127 (5")		153 (6")
Taper of center	MT. No. 4							
Motor								
Main spindle	Std. 10 HP (7.5 kW) Opt. 12.5 HP (9.375 kW)							
	Std. AC 7.5 kW (10 HP) Opt. AC 9.375 kW (12.5 HP), Inverter (15 HP / 11.25 kW)							
Forced lubrication for headstock	--							
	1/4 HP							
Coolant pump	1/8 HP							
Measurement								
Weight (Net) approx	1750 kgs	1900 kgs	1800 kgs	1950 kgs	2350 kgs	1850 kgs	2000 kgs	2400 kgs
Weight (Gross) approx	1950 kgs	2150 kgs	2000 kgs	2200 kgs	2650 kgs	2050 kgs	2250 kgs	2700 kgs
Packing size (Length)	2400	2900	2400	2900	3700	2400	2900	3700
Packing size (Width x Height)	1155 (45.5") x 1900 (74.8")							

Specifications subject to change without notice.

Unit: mm



AHL-1840 / 1860 / 1880 / 18120
AHL-2240 / 2260 / 2280 / 22120

AHL-1840V / 1860V / 1880V / 18120V
AHL-2240V / 2260V / 2280V / 22120V

- All models with mechanical clutch. (Excluded E.V.S. model)
- All models with auto lubrication system to headstock & external tank for cooling the oil.
- All models meet CE. (Upon request)
- All models with 80 mm (3.149") spindle bore, ASA D1-8.

Features

- All castings are properly stabilized and stress relieved.
- Bed ways are hardened & ground to min. HRC 48-55.
- Turcite B coating between the bed and carriage.
- Extremely low noise level.
- Foot brake pedal provided.
- Built-in coolant pump & fitting provided.
- CSS (Constant surface speed control) on request for E.V.S. model.
- Wider bed way which give absorbs vibration.

Standard Accessories

- Backplate for 12" chuck
- Dead center MT. No. 5
- Dead center MT. No. 5 with carbide tip
- Spindle center sleeve MT. No. 7
- Level pads.....8 ~ 10 pcs
- Tool set & Box
- Operation manual & parts list
- Working lamp
- Full length splash guard



Photo shown AHL-2260V / G3

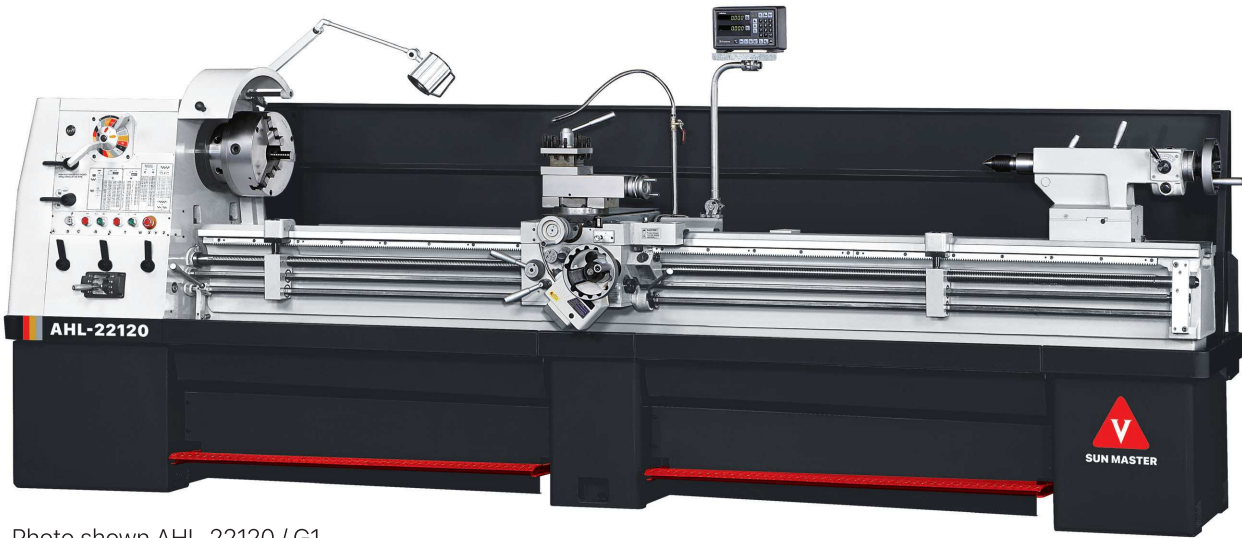


Photo shown AHL-22120 / G1

AHL	1840	1860	1880	18120	2240	2260	2280	22120
	1840V	1860V	1880V	18120V	2240V	2260V	2280V	22120V
Capacity								
Height of centers	230 (9.055")				280 (11.02")			
Swing over bed	Ø460 (18.11")				Ø560 (22.04")			
Swing in gap	Ø710 (27.95")				Ø808 (31.81")			
Swing over cross slide	Ø298 (11.73")				Ø390 (15.35")			
Distance between centers	1000 (40")	1500 (60")	2000 (80")	3000 (120")	1000 (40")	1500 (60")	2000 (80")	3000 (120")
Width of bed	345 (13.58")							
Gap width in front of faceplate	250 (9.84")							
Headstock and Main Spindle								
Spindle nose, internal taper	D1-8, MT. No. 7							
Spindle center sleeve	MT. No. 7 x MT. No. 5							
Spindle bore	Ø80 (3.149")							
Spindle speed:	16 steps / 20 ~ 1600 R.P.M.			Silver (20, 65, 210, 670)		Golden (25, 85, 280, 900)		
Gear steps / Range	Disc clutch for forward / Reverse			Red (35, 115, 380, 1200)		Black (50, 150, 500, 1600)		
	4 steps			L (18~55 R.P.M.)		M (55~180 R.P.M.)		
	Infinitely variable			MH (180~600 R.P.M.)		H (600~1800 R.P.M.)		
Carriage								
Length on bed / Width of carriage	543 (21.37") / 542 (21.33")							
Cross slide travel	272 (10.7")							
Top slide travel	135 (5.31")							
Threads and Feeds								
Whitworth threads: Kinds / Range	38 Kinds / 2 ~ 72 T.P.I.							
Metric threads: Kinds / Range	40 Kinds / 0.4 ~ 14 mm							
D.P. threads: Kinds / Range	21 Kinds / 8 ~ 44 D.P.							
M.P. threads: Kinds / Range	18 Kinds / 0.3 ~ 3.5 M.P.							
Longitudinal feeds	0.04 ~ 1.0 (0.0015" ~ 0.04")							
Cross feeds	0.02 ~ 0.5 (0.00075" ~ 0.02")							
Tailstock								
Quill diameter	Ø76 (3")							
Quill travel	165 (6.5")							
Taper of center	MT. No. 5							
Motor								
Main spindle	10 HP				12.5 HP			
	Motor AC 7.5kW (10HP), Inverter 11.25kW (15 HP)				Motor AC 9.4kW (12.5 HP), Inverter 11.25kW (15 HP)			
Forced lubrication for headstock	--				--			
	1/4 HP				1/4 HP			
Coolant pump	1/8 HP							
Measurement								
Weight (Net) approx	2000 kgs	2200 kgs	2500 kgs	3000 kgs	2150 kgs	2350 kgs	2650 kgs	3150 kgs
Weight (Gross) approx	2140 kgs	2360 kgs	2700 kgs	3260 kgs	2290 kgs	2510 kgs	2850 kgs	3410 kgs
Packing size (Length)	2535 (99.8")	3035 (119.5")	3535 (139.2")	4624 (182")	2535 (99.8")	3035 (119.5")	3535 (139.2")	4624 (182")
Packing size (Width x Height)	1120 (44.1") x 1900 (74.8")							

Specifications subject to change without notice.

Unit: mm



CH-2260 / 2290 / 22120 / 22160 / 22200
CH-2660 / 2690 / 26120 / 26160 / 26200
CH-3060 / 3090 / 30120 / 30160 / 30200

CH-2260V / 2290V / 22120V 22160V / 22200V
CH-2660V / 2690V / 26120V 26160V / 26200V
CH-3060V / 3090V / 30120V 30160V / 30200V

- All models meet CE. (Upon request)
- All models with 104 mm (4.094") spindle bore, ASA D1-11.

Features

- All castings are properly stabilized and stress relieved.
- Bed ways are hardened & ground to min. HRC 48-55.
- Extremely low noise level.
- Foot brake pedal provided.
- Wider bed way which give absorbs vibration.
- Y-Δ type spindle motor equipped to make sure smooth start and operation.
- Oil distributor may be adjusted to lubricate bedways, cross slide, or both.
- Automatic and manual forced lubrication pump offered oil to bed ways and cross slide.
- 3V sliding ways provide more stable displacement and processing smoothness.

Standard Accessories

- Dead center MT. No. 5
- Dead center MT. No. 5 with carbide tip
- Spindle center sleeve MT. No. 7 x MT. No. 5
- Level pads.....6 ~ 10 pcs
- Tool set & Box
- Operation manual & parts list
- Full length splash guard
- Working lamp

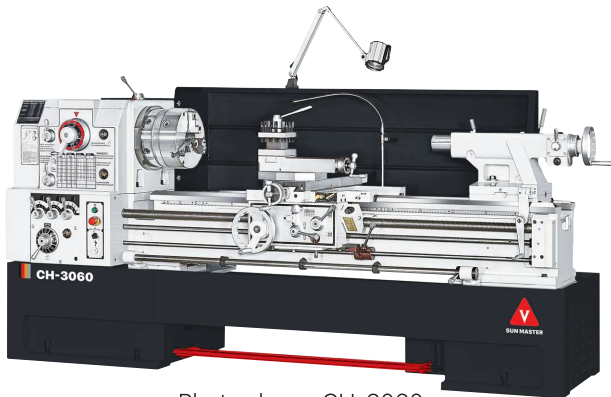


Photo shown CH-3060


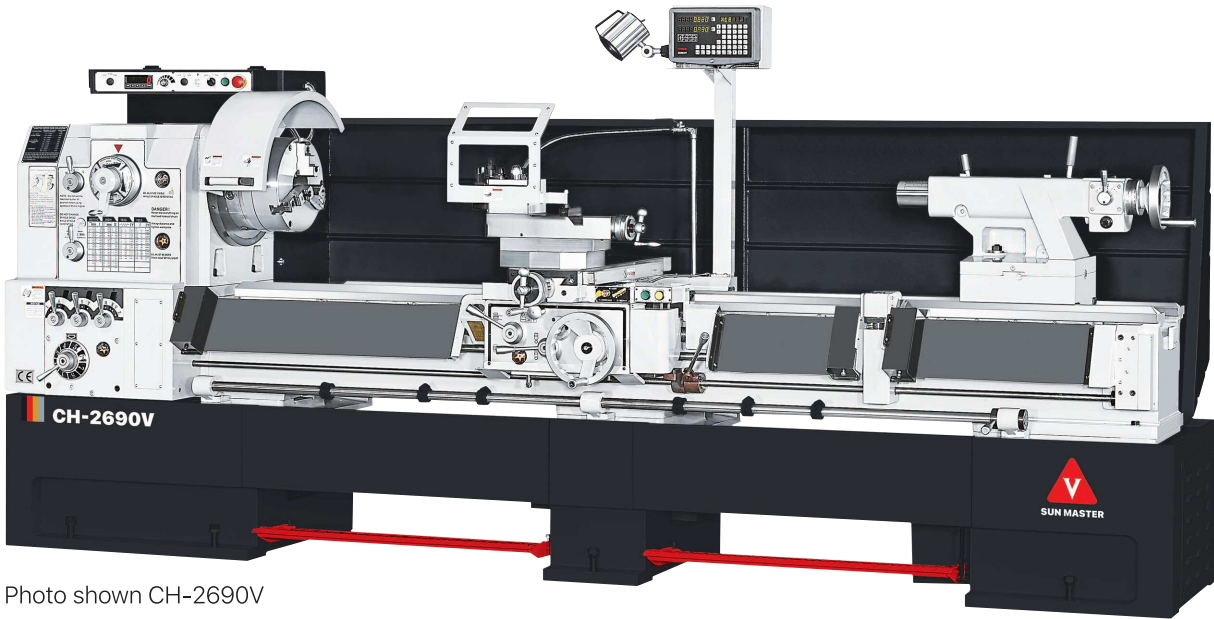


Photo shown CH-2690V

CH		2260 / 2290 / 22120 / 22160 / 22200	2660 / 2690 / 26120 / 26160 / 26200	3060 / 3090 / 30120 / 30160 / 30200
		2260V / 2290V / 22120V / 22160V / 22200V	2660V / 2690V / 26120V / 26160V / 26200V	3060V / 3090V / 30120V / 30160V / 30200V
Capacity				
Swing over bed		560 (22")	660 (26")	760 (30")
Swing in gap		Ø797 (31.37")	Ø892 (35.11")	Ø990 (38.97")
Swing over cross slide		Ø340 (13.38")	Ø445 (17.51")	Ø548 (21.57")
Gap width in front of faceplate		270 (10.63")		
Distance between centers		1500 (60"), 2300 (90"), 3000 (120"), 4000 (160"), 5000 (200")		
Width of bed		400 (15.75")		
Top slide travel		228 (8.98")		
Cross slide travel		400 (15.75")		
Headstock and Main Spindle				
Spindle nose type		D1-11		
Spindle center sleeve		MT. No. 7 x MT. No. 5		
Spindle bore		Ø104 (4.094")		
Spindle speed		12 steps		
		4 steps		
Speed range (60 hz)		4P: 13, 20, 30, 47, 70, 105, 150, 230, 340, 530, 800, 1200 R.P.M.		
		N1: 20 ~ 109 R.P.M.; N2: 45 ~ 240 R.P.M.; N3: 140 ~ 740 R.P.M.; N4: 310 ~ 1600 R.P.M.		
		Infinitely variable		
Threads and Feeds				
Whitworth threads: Kinds / Range		44 Kinds / 2 ~ 72 T.P.I.		
Metric threads: Kinds / Range		39 Kinds / 0.2 ~ 14 mm		
Diameter of leadscrew		Ø45 (1.77")		
Pitch of leadscrew		4 T.P.I., P = 6 mm		
Longitudinal feeds		Metric: 0.035 ~ 0.98 / rev; inch: 0.0012 ~ 0.039 / rev		
Cross feeds		Metric: 0.011 ~ 0.296 / rev; inch: 0.0004 ~ 0.0117 / rev		
Tailstock				
Quill diameter		Ø80 (3.15")		
Quill travel		250 (10")		
Taper of center		MT. No. 5		
Motor				
Main spindle		Std. : 15 HP (11.25 kW) Opt. : 20 HP (15 kW)		
		15 HP (11.25 kW) Motor + 20 HP (15 kW) Inverter		
Coolant pump		1/8 HP		
Measurement				
Weight (Net) approx	60"	2860 kgs	2950 kgs	3040 kgs
	90"	3310 kgs	3400 kgs	3490 kgs
	120"	3545 kgs	3635 kgs	3725 kgs
	160"	4150 kgs	4240 kgs	4330 kgs
	200"	4600 kgs	4690 kgs	4780 kgs
Packing size length		3255 (128.14") / 4055 (159.64") / 4755 (187.2") / 5755 (226.57") / 6755 (265.94")		
Width x Height		1150 (45.27") x 1700 (66.9")		

Specifications subject to change without notice.

Unit: mm

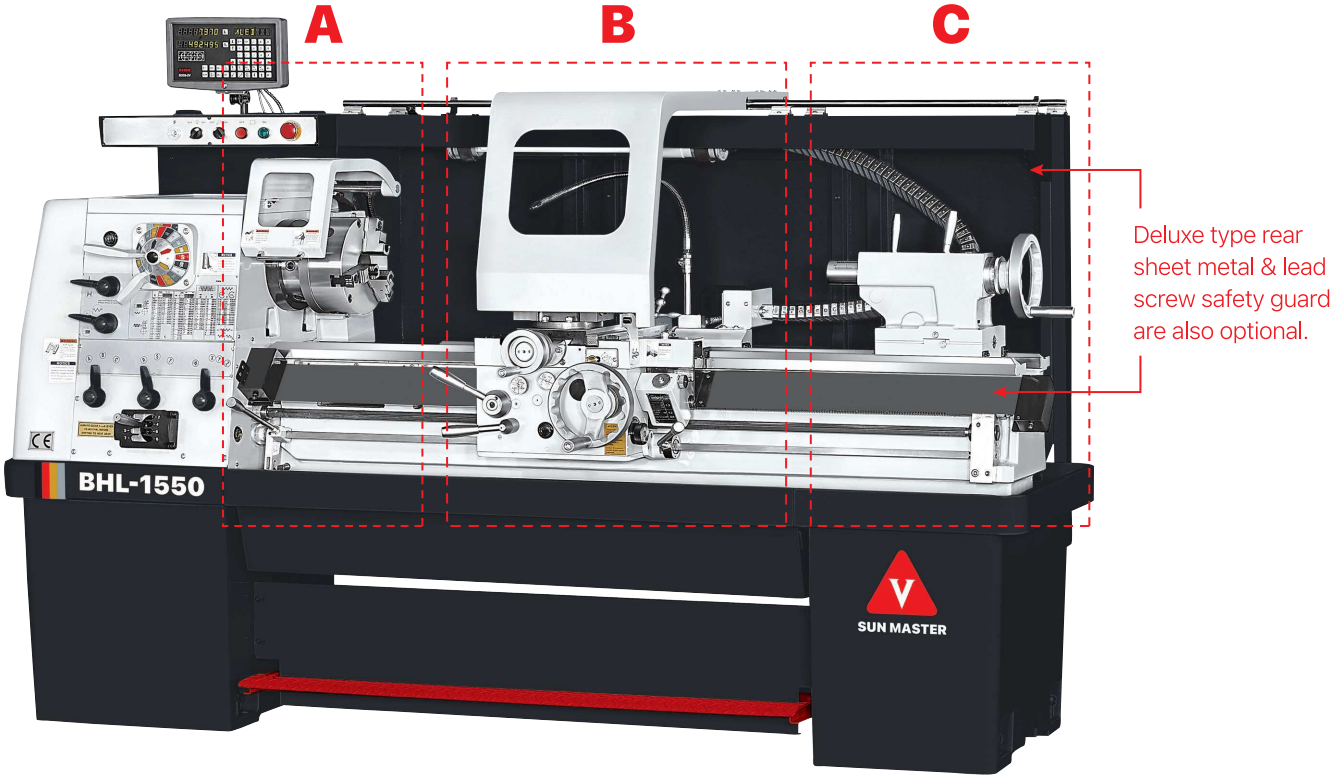

A



Faceplate
Slotted. For all models.



4 & 3 Jaws Chuck



Chuck Safety Guards
Solid and clear acrylic material for safety.



Micrometer Carriage Stop



5-Step Carriage Stop



5C Lever Type Collet Closer

B



Digital Readout System (DRO)
Operator friendly readout systems reduce setup time and increase productivity.
Features available:

- Tool offsets for easy compensation of different tool sizes.
- Instant radius / diameter conversion reduces math errors and allows you to machine to print dimensions.
- 2 or 3 axes display.
- Preset and zero rest.
- Instant inch/mm conversion.
- Near-zero warning.
- Most popular brands.



Steady Rest
For all models with roller tips.



Follow Rest
For all models. With bronze or roller tips.



Tool Post Safety Guard



Hand Wheel Cover



LED Light



Quick Change Tool Post Set



Power Feed



Telescopic Taper Attachment
Available for all models.

C



Drill Chucks
Keyless and key type. All sizes available.
Live Centers